

Receiver

DROPLANT Sp.J. Krzysztof Zimnicki

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60198015H

Customer pos. no.:
Model :

NOVA 600 M-A 40th - 10m

Pump data

Free passage : 10 mm
Aspiration level minimum : 150 mm
Max. immersion depth : 7 m
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C

Requested data

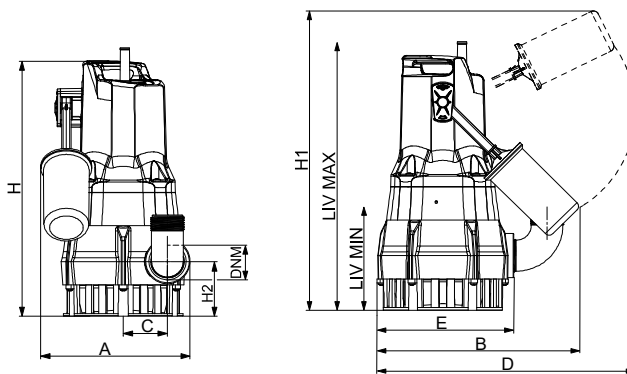
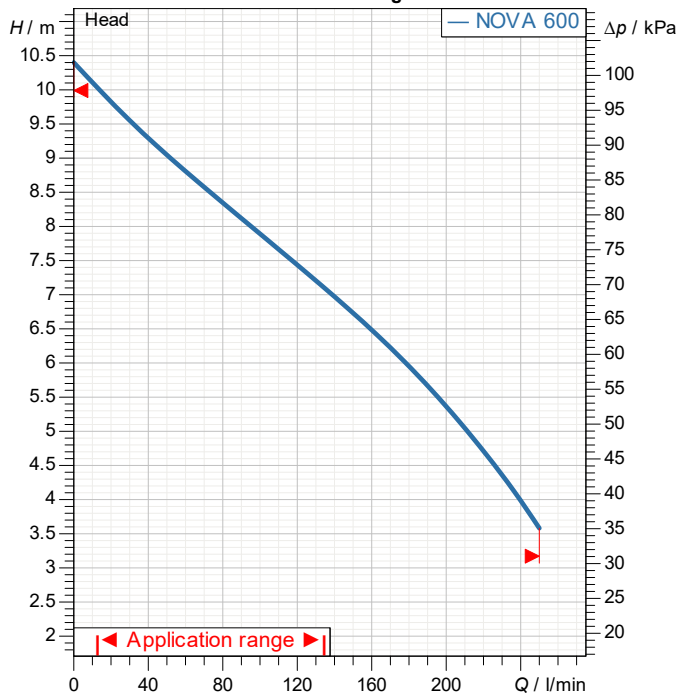
Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 2.34 kPa

Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body : Technopolymer
Impeller : Technopolymer
O-Ring : NBR Rubber
Rotor shaft : Stainless Steel AISI 431
Suction strainer : Technopolymer
Motor top body : AISI 304 X5 Cr Ni 1810 UNI 6900/71
Float : Technopolymer

Curve tolerance according to ISO 9906

Motor data

Motor brand : DAB
Nominal power P2 : 0.5 kW
Rated voltage : 1~ 230 V 50 Hz
Nominal current : 3 A
Degree of protection : IP 68
Cable length m : 10

Weight : 7 kg

Dimensions in mm

A	189	H2	71		
B	255	LIV MAX	390		
C	56	LIV MIN	190		
D	296				
DNM	1"1/4 G				
E	174				
H	329				
H1	443				

Pump connection

Suction side : /
Discharge side : 1" 1/4 GAS / --

Receiver

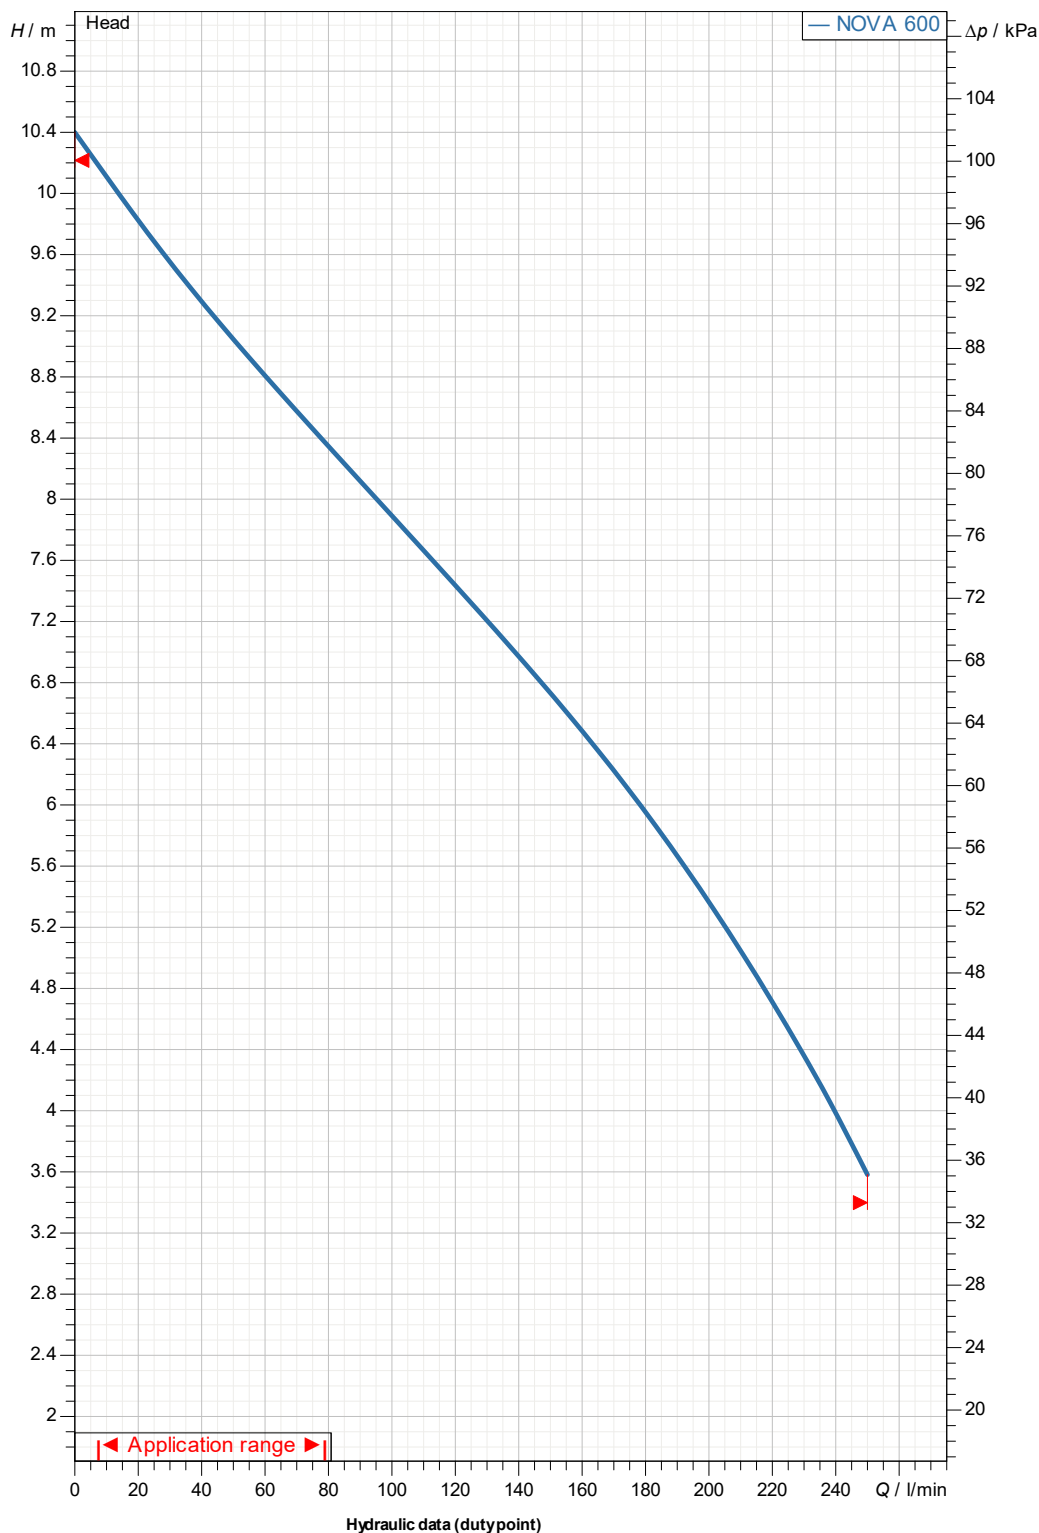
From

Company
Reference
Address
Phone
Fax
E-mail

DROPLANT Sp.J. Krzysztof Zimnicki

NOVA 600 M-A 40th - 10m

Curve tolerance according to ISO 9906



Suction side :

Discharge side :
1" 1/4 GAS
--

Flow :

Head :

Rated speed :
2900 1/min

MAIN_PROJECT_TITLE
QUO-98930-H2Z0G7

BUSINESS_PROCESS_ID
nova NG Panel

OWNER_

ISSUE_DATE
2026-01-13

